

(19)



Europäisch s Pat ntamt
European Pat nt Offic
Offic europé n d s br v ts



(11)

EP 0 984 330 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

08.03.2000 Bulletin 2000/10

(51) Int Cl.7: **G03G 5/10, C08K 3/04**

(21) Application number: **99306885.7**

(22) Date of filing: **31.08.1999**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI

• **Nishimuro, Youichi**

Kunitachi-shi, Tokyo (JP)

• **Machida, Kunio**

Suginami-ku, Tokyo (JP)

(30) Priority: **31.08.1998 JP 24463198**

(71) Applicant: **Bridgestone Corporation
Tokyo (JP)**

(74) Representative: **Stoner, Gerard Patrick et al**

MEWBURN ELLIS

York House

23 Kingsway

London WC2B 6HP (GB)

(72) Inventors:

• **Iizuka, Munenori**

Kodaira-shi, Tokyo (JP)

(54) Electrically conductive resin composition and photosensitive drum made therewith

(57) The invention relates to a photosensitive drum based on a cylindrical base which is made with an electrically conductive resin composition which comprises a polyamide resin as the resin component and an electrically conductive material, said polyamide resin being one selected from the group consisting of polyamide

resins obtained from m-xylylenediamine and adipic acid, polyamide resins obtained from ε-caprolactam, and mixtures thereof. The cylindrical base for the photosensitive drum has good surface smoothness as well as good mechanical strength, and it can be obtained easily by injection molding or the like from said resin composition.

EP 0 984 330 A1

Description

BACKGROUND

5 [0001] The present invention relates to an electrically conductive resin composition suitable for use as a material to form the cylindrical base of the photosensitive drum in electrophotographic machines such as copying machines, facsimiles, and printers. The present invention relates also to a photosensitive drum whose cylindrical base is made with said electrically conductive resin composition.

10 [0002] Copying machines, facsimiles, and printers employ the electrostatic recording process. The process for printing consists of uniformly charging the surface of a photosensitive drum, projecting an image onto the charged surface through an optical system so that charge disappears from the exposed part, thereby forming a latent image thereon, supplying the latent image with a toner, thereby forming a toner image due to electrostatic attraction between them, and transferring the toner image to a recording medium such as paper, OHP, and photographic paper.

15 [0003] The above-mentioned electrostatic recording process usually employs a photosensitive drum constructed as shown in Fig. 1.

[0004] Specifically, it consists of a cylindrical base 1 having good electrical conductivity, two flanges 2a and 2b fitted into both ends of the cylindrical base 1, and a photosensitive layer 3 formed on the peripheral surface of the cylindrical base 1. As shown in Fig. 1, the photosensitive drum is usually supported by two axes 4 and 4 fixed to the main body 10 of the electrophotographic apparatus and the axes are inserted into the holes 5 and 5 formed in the flanges 2a and 2b, so that the photosensitive drum turns freely. On the periphery of one flange 2b is formed a gear 6 which engages with a gear 7 connected to a drive motor. The cylindrical base 1 thus constituted is allowed to rotate.

[0005] The cylindrical base 1 mentioned above is conventionally made with aluminum alloy because of its light weight, good machinability, and high electrical conductivity.

25 [0006] Unfortunately, the cylindrical base of aluminum alloy needs high-precision machining if it is to meet stringent requirements for dimensions and surface roughness. It also needs machining for the holes into which the flanges 2a and 2b are fitted. Moreover, it may need surface treatment to prevent surface oxidation. These added steps lead to a high production cost. Therefore, aluminum alloy is not necessarily a satisfactory raw material for the cylindrical base to constitute the photosensitive drum.

30 [0007] There has been proposed an idea of making the cylindrical base 1 from a resin composition composed mainly of polyphenylene sulfide (PPS) resin by injection molding. The molding process is comparatively easy and the resulting cylindrical base is light in weight and superior in chemical and heat resistance. In addition, the cylindrical base 1 can be molded integrally with either of the flanges 2a and 2b from the same resin composition.

35 [0008] When the above-mentioned PPS-based resin composition is made into the cylindrical base 1 for the photosensitive drum, it is usually incorporated with carbon black in an amount more than 20% by weight so that it is given electrical conductivity. Unfortunately, any PPS resin composition with such a high content of carbon black is very brittle and hence it is incorporated with a reinforcement such as glass fiber so that the resulting cylindrical base has a required strength.

[0009] The disadvantage of the PPS resin composition incorporated with carbon black and glass fiber is extremely poor in flowability in the molten state. Thus the resulting cylindrical base is poor in surface smoothness because the finished surface of the mold is not completely transferred at the time of injection molding. This poses a serious problem in the subsequent steps of applying a photosensitive material to the surface, thereby forming a photosensitive layer.

45 [0010] Thus, it is an object of the present invention to provide an electrically conductive resin composition which can be easily made by injection molding into a cylindrical base of a photosensitive drum which has surface smoothness with mechanical strength. It is another object of the present invention to provide a photosensitive drum formed on the cylindrical base made with the above-mentioned electrically conductive resin composition.

[0011] We have prepared conductive resin compositions which can give a molded product (or cylindrical base) having good mechanical strength and stiffness as well as good surface smoothness. Thus, the present invention makes it possible to produce a good or high-performance photosensitive drum (light in weight and high in strength) easily without requiring complex processes.

BRIEF DESCRIPTION OF THE DRAWING

[0012] Fig. 1 is a schematic sectional view showing one example of photosensitive drums.

55 [0013] In order to address the above-mentioned issues the present inventors carried out a series of researches which led to the finding that a polyamide resin obtained from m-xylylenediamine and adipic acid has good heat resistance, good chemical resistance, high mechanical strength and small dimensional change after injection molding. The present inventors also found that a polyamide resin obtained from ε-caprolactam has good heat resistance, good chemical resistance, high mechanical strength and good injection moldability.

[0014] These properties are desirable for the resin to be formed into the cylindrical base of the photosensitive drum. Since the polyamide resins have slower crystallizing rate than any other crystalline resins, the resins easily form a skin layer on the surface of the molded product even when they are incorporated with an electrically conductive material such as carbon black and/or reinforcing inorganic filler such as whisker to improve mechanical properties such as strength and stiffness. In other words, the resulting molded product has good strength and stiffness as well as good surface smoothness.

[0015] The present invention is based on these findings.

[0016] Thus, the present invention covers an electrically conductive resin composition which comprises a polyamide resin as the resin component and an electrically conductive material, said polyamide resin being one selected from the group consisting of polyamide resins obtained from m-xylylenediamine and adipic acid, polyamide resins obtained from ϵ -caprolactam, and mixtures thereof.

[0017] The present invention also covers a photosensitive drum made up of a cylindrical base and a photosensitive layer formed on its peripheral surface, wherein said cylindrical base is formed from the electrically conductive resin composition defined above.

[0018] The invention will be explained in more detail in the following.

[0019] According to the present invention, the electrically conductive resin composition contains as the resin component a polyamide resin which is obtainable from m-xylylenediamine and adipic acid and/or a polyamide resin which is obtainable from ϵ -caprolactam, and the photosensitive drum has a cylindrical base formed from the electrically conductive resin composition.

[0020] The polyamide resin for the resin component of the electrically conductive resin composition is one which is produced from m-xylylenediamine and adipic acid through polycondensation reaction and/or one which is produced from ϵ -caprolactam through ring opening polymerization reaction. The former is generally referred to as nylon MXD6. The latter is generally referred to as nylon-6.

[0021] The electrically conductive resin composition of the present invention contains the specific polyamide resin (nylon MXD6 and/or nylon-6) as the resin component. Nylon MXD6 and/or nylon-6 may be used in combination with any other resin if necessary. The other resin is not specifically restricted so long as the object of the present invention is achieved. Preferred examples of such resins are (other) polyamide resins e.g. nylon-11, nylon-12, nylon-46, nylon-66, nylon-610, nylon-612, nylon-1212, and copolymers thereof. The amount of these resins are not specifically restricted, although it should preferably be such that nylon MXD6 and/or nylon-6 accounts for at least 30-100% by weight, particularly 40-100% by weight of the resin.

[0022] The resin composition of the present invention is incorporated with an electrically conductive material so that it has electrical conductivity. The electrically conductive material is not specifically restricted so long as it can be uniformly dispersed into the above-mentioned resin. It includes, for example, carbon black, graphite powder, aluminum powder, copper powder, nickel powder, and electrically conductive glass powder, with carbon black being especially preferred. The amount of the electrically conductive material is not specifically restricted; however, it should preferably be 5-30% by weight, particularly 5-20% by weight of the resin composition, so that the resulting molded product has a surface resistance lower than $10^4 \Omega/\square$, particularly lower than $10^2 \Omega/\square$ (ohm/square).

[0023] The resin composition of the present invention may be incorporated with an inorganic filler in the form of fiber for the purpose of reinforcement and extension. The fibrous inorganic filler includes carbon fiber, glass fiber, and whisker (conductive or non-conductive). In the case where conductive fiber is used, it is possible to reduce the amount of the above-mentioned electrically conductive material.

[0024] The amount of the filler may vary depending on its kind and the length and diameter of fiber and hence it is not specifically restricted. It is usually 1-30% by weight, preferably 5-25% by weight, more preferably 10-25% by weight in the composition. When incorporated with filler mentioned above, we find that the resin composition gives a molded product exhibiting improved strength and stiffness without sacrificing its surface smoothness.

[0025] The electrically conductive resin composition of the present invention may be incorporated, in addition to the above-mentioned electrically conductive material and filler, with any known additives, such as polytetrafluoroethylene (PTFE), silicone, molybdenum disulfide (MoS_2), and metal soap, in a proper amount. The filler may be surface-treated with a silane or titanate coupling agent in common use.

[0026] Now, a photosensitive drum is shown in Fig. 1. It consists of a cylindrical base 1 and a photosensitive layer 3 formed on its peripheral surface. The cylindrical base 1 is made with the above-mentioned electrically conductive resin composition.

[0027] In the case of the photosensitive drum shown in Fig. 1, the cylindrical base 1 has individually molded flanges 2a and 2b fitted and fixed to both ends thereof. According to the present invention, however, at least either one of the flanges 2a and 2b can be molded integrally with the cylindrical base 1. In addition, the flange may have the drive gear 6 formed thereon because it is molded from the electrically conductive resin composition (filled with an inorganic reinforcement) and hence it has high strength and stiffness.

[0028] The molding of the cylindrical base 1 from the electrically conductive resin composition may be accomplished

in any way, although injection molding is preferable. Molding conditions, such as temperature and pressure, may be the same as usually employed for nylon MXD6 and/or nylon-6.

[0029] The peripheral surface of the cylindrical base 1 should preferably be smooth as defined below in terms of surface roughness.

Center line average roughness (Ra):

[0030]

smaller than $0.8\text{ }\mu\text{m}$, particularly smaller than $0.2\text{ }\mu\text{m}$. Maximum height (Rmax);
smaller than $1.6\text{ }\mu\text{m}$, particularly smaller than $0.8\text{ }\mu\text{m}$. 10-point average roughness (Rz);
smaller than $1.6\text{ }\mu\text{m}$, particularly smaller than $0.8\text{ }\mu\text{m}$.

[0031] If these Ra, Rmax, Rz of the surface are bigger than specified above, increasingly the surface irregularities of the cylindrical base 1 may manifest themselves in the photosensitive layer 3, reducing image quality. The requirement for surface smoothness is easily achieved with electrically conductive resin compositions as proposed herein, even when they incorporate reinforcing inorganic filler.

[0032] The cylindrical base 1, with either one of flanges 2a and 2b molded integrally, is subsequently provided by fitting with the other flange which has been molded separately. The second flange may be molded from any material such as metal, electrically conductive resin, and non-electrically conductive resin. However, it is desirable to use the same electrically conductive resin composition as used for the cylindrical base 1, from the standpoint of balance between strength and conductivity. The fitted flange may be fastened with an adhesive if necessary.

[0033] To complete the photosensitive drum the cylindrical base 1 is provided with a photosensitive layer 3 on its peripheral surface. This photosensitive layer may be formed from any known material with a known composition and it may have any known layer structure.

[0034] Incidentally, the photosensitive drum of the present invention is not necessarily restricted to the one shown in Fig. 1. For example, it may be supported by axes projecting from the flanges in place of axes inserted into holes 5 in the flanges 2a, 2b. The shape of the flanges 2a, 2b and the method of driving the photosensitive drum may be modified adequately within the scope of the present invention.

EXAMPLE

[0035] The invention will be described in more detail with reference to the following embodiments and comparative examples.

[0036] Electrically conductive resin compositions were prepared in the usual way from the components shown in Table 1. Each composition was made, by injection molding, into the cylindrical base for the photosensitive drum, measuring 30 mm in outside diameter, 230 mm long, and 2 mm in wall thickness. Injection molding was carried out under the same condition for all the compositions.

[0037] The resulting cylindrical base was examined for surface roughness (center line average roughness Ra, maximum height Rmax, and 10-point average roughness Rz). Measurements were carried out according to JIS B0601 by using "Surfcon" (from Tokyo Seimitsu Co., Ltd.). The results are shown in Table 1.

Table 1

		Example						Comparative Example		
		1	2	3	4	5	6	1	2	3
Components (wt%)	PA66*1	55	41	-	-	41	-	82	78	-
	PA6*2	-	-	-	55	35	78	-	-	-
	PAMXD6*3	23	35	78	23	-	-	-	-	-
	PPS*4	-	-	-	-	-	-	-	-	55
	Carbon black	12	9	12	12	9	12	18	12	20
	Conductive whisker*5	10	15	10	10	15	10	-	10	-
	Glass fiber	-	-	-	-	-	-	-	-	25
Surface roughness	Ra (μm)	0.05	0.06	0.04	0.05	0.06	0.05	0.22	0.44	0.79
	Rmax (μm)	0.56	0.95	0.48	0.75	1.05	0.55	3.92	2.73	5.44
	Rz (μm)	0.32	0.54	0.21	0.33	0.95	0.42	2.24	2.59	3.36

*1: nylon-66 (containing 18% carbon black), "Stattokon R" from Kawasaki Seitetsu Co., Ltd.

*2: nylon-6, "UBE-nylon" from Ube Kosan Co., Ltd.

*3: nylon MXD6, "Rany" from Mitsubishi Kagaku Co., Ltd.

*4: polyphenylene sulfide

*5: "Dentol" from Otsuka Kagaku Co., Ltd.

[0038] It is noted from Table 1 that the cylindrical base for the photosensitive drum was superior in surface smoothness when formed from the electrically conductive resin composition according with the present invention.

Claims

1. An electrically conductive resin composition having:

- a resin component comprising polyamide resin, selected from polyamide resins obtainable from m-xylylene-diamine and adipic acid and polyamide resins obtainable from ε-caprolactam, and
- electrically conductive material.

2. An electrically conductive resin composition as defined in Claim 1, wherein the electrically conductive material is carbon black.


3. An electrically conductive resin composition as defined in Claim 2, wherein the carbon black is contained in an amount of 5-30% by weight.

4. An electrically conductive resin composition as defined in any one of Claims 1 to 3, which further comprises a reinforcing inorganic filler dispersed and mixed therein in an amount of 1-30% by weight.

5. A photosensitive drum made up of a cylindrical base and a photosensitive layer formed on the peripheral surface thereof, wherein said cylindrical base is one which is made with the electrically conductive resin composition defined in any one of claims 1 to 4.

6. The use of a composition according to any one of claims 1 to 4 to make a cylindrical base for a photosensitive drum.

FIG.1

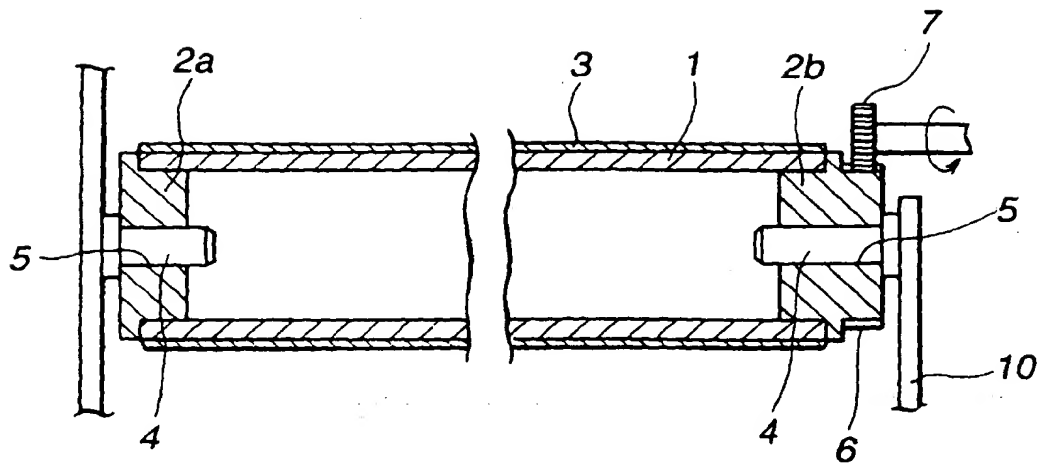



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 6885

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DATABASE WPI Section Ch, Week 199227 Derwent Publications Ltd., London, GB; Class A60, AN 1992-223640 XP002124504 & JP 04 149907 A (MITSUBISHI), 22 May 1991 (1991-05-22) * abstract *	1-3	G03G5/10 C08K3/04
X	US 5 277 855 A (L.E.BLACKMON) 11 January 1994 (1994-01-11) * column 4, line 42 - line 48; example 1 *	1-3	
X	DATABASE WPI Section Ch, Week 199038 Derwent Publications Ltd., London, GB; Class A28, AN 1990-286361 XP002124505 & JP 02 201811 A (NIPPON GE PLASTICS), 10 August 1990 (1990-08-10) * abstract *	1-3	
X	DE 36 44 773 A (MISUBISHI) 1 October 1987 (1987-10-01) *, sentence 43 - sentence 48; claims 1,2 *	1-4	G03G C08K
X	DATABASE WPI Section Ch, Week 198933, 6 March 1989 (1989-03-06) Derwent Publications Ltd., London, GB; Class A23, AN 1989-239530 XP002124506 & KR 8 900 045 A (KOLON) * abstract *	1-4	
A	US 5 128 091 A (E.E.AGUR) 7 July 1992 (1992-07-07) * column 7, line 2 - line 18; claim 1 *	5,6	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 December 1999	Examiner Vanhecke, H
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C31)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 6885

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 14, no. 303 (P-1070), 29 June 1990 (1990-06-29) & JP 02 097966 A (TOYOTO), 10 April 1990 (1990-04-10) * abstract *	5,6	
A	PATENT ABSTRACTS OF JAPAN vol. 14, no. 40 (P-995), 25 January 1990 (1990-01-25) & JP 01 273052 A (RICOH), 31 October 1989 (1989-10-31) * abstract *	5,6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 December 1999	Examiner Vanhecke, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background C : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 92 (PUSCH)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 6885

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-12-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 4149907 A	22-05-1992	JP 2961865 B	12-10-1999
US 5277855 A	11-01-1994	EP 0596849 A	11-05-1994
JP 2201811 A	10-08-1990	JP 2756548 B	25-05-1998
DE 3644773 A	01-10-1987	JP 2017782 C	19-02-1996
		JP 7045622 B	17-05-1995
		JP 62227952 A	06-10-1987
		FR 2596567 A	02-10-1987
		US 4702859 A	27-10-1987
KR 8900045 A		NONE	
US 5128091 A	07-07-1992	DE 69213277 D	10-10-1996
		DE 69213277 T	13-02-1997
		EP 0501738 A	02-09-1992
		JP 2080948 C	09-08-1996
		JP 5061230 A	12-03-1993
		JP 7120061 B	20-12-1995
JP 02097966 A	10-04-1990	NONE	
JP 01273052 A	31-10-1989	NONE	

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (U9PT0)